
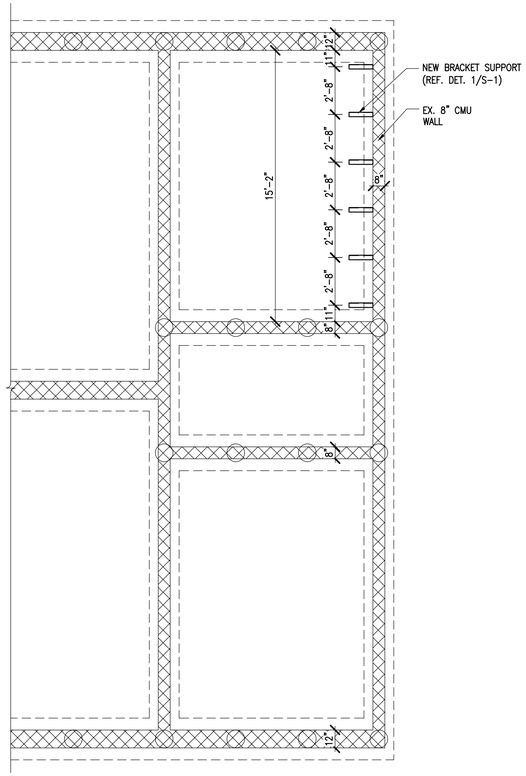



PARTIAL FOUNDATION PLAN

SCALE: 1/4"=1'-0"

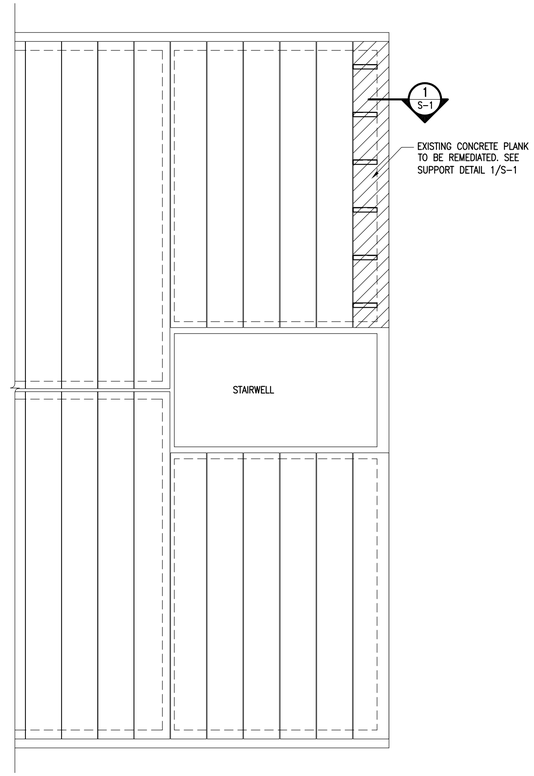

PARTIAL FIRST FLOOR FRAMING PLAN

SCALE: 1/4"=1'-0"

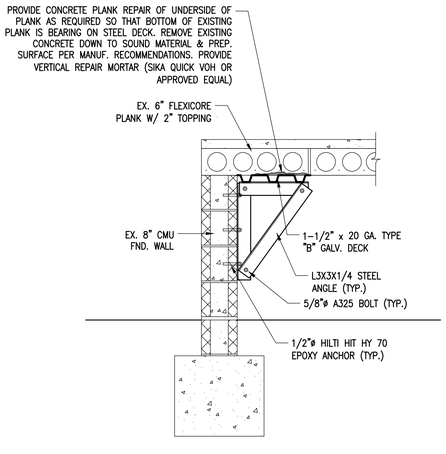

1/S-1 SUPPORT DETAIL

SCALE: 3/4"=1'-0"

GENERAL NOTES

CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND FIELD CONDITIONS ON THE DRAWINGS AND IN THE FIELD PRIOR TO STARTING CONSTRUCTION AND FABRICATION.

ALL PRODUCTS AND MATERIALS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER RECOMMENDATIONS AND IN ACCORDANCE WITH APPLICABLE CONSTRUCTION INDUSTRY STANDARDS.

CONTRACTOR SHALL BE RESPONSIBLE FOR THE COSTS ASSOCIATED WITH ALL BUILDING PERMITTING AND ALL SOILS, CONCRETE, AND METAL STRUCTURE TESTING AND INSPECTIONS REQUIRED DURING CONSTRUCTION.

CONTRACTOR SHALL BE RESPONSIBLE FOR PROJECT MANAGEMENT AND SUPERVISION AND SHALL PROVIDE THE NECESSARY TEMPORARY FACILITIES AND CONTROLS REQUIRED FOR CONSTRUCTION.

CONTRACTOR SHALL VERIFY ALL OPENING SIZES AND LOCATIONS WITH THE REQUIREMENTS OF OTHER TRADES PRIOR TO FABRICATION AND ERECTION.

CONTRACTOR SHALL BE RESPONSIBLE FOR DESIGNING, FURNISHING, ERECTING, AND REMOVING ANY TEMPORARY SHORING AND BRACING DURING CONSTRUCTION.

CONTRACTOR SHALL PROTECT FROM DAMAGES EXISTING BUILDING(S), OWNER EQUIPMENT, ROADS, WALKS, AND UTILITIES. CONTRACTOR SHALL MAINTAIN THESE DURING THE COURSE OF THE WORK, AND SHALL REPAIR ALL DAMAGES AT NO ADDITIONAL EXPENSE TO THE OWNER.

CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING DEMOLISHED MATERIALS FROM THE PROJECT SITE AND FOR PROVIDING PROPER AND LEGAL DISPOSAL OF SUCH MATERIALS.

ARCHITECT AND ENGINEER SHALL BE NOTIFIED WHEN MATERIALS AND ASSEMBLIES ARE READY FOR OBSERVATION. SUFFICIENT NOTICE SHALL BE GIVEN BY THE CONTRACTOR TO ALLOW FOR SCHEDULING OF OBSERVATIONS.

SAFETY AND ENVIRONMENTAL REGULATIONS SHALL BE STRICTLY FOLLOWED BY THE CONTRACTOR AND SUBCONTRACTORS CONTINUOUSLY DURING ALL TIMES OF WORK ON THIS PROJECT AND WILL NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING AND MAINTAINING ALL BARRICADES, WARNING SIGNS, FLASHING LIGHTS, AND TRAFFIC CONTROL DEVICES DURING CONSTRUCTION.

THE ARCHITECT OR ENGINEER SHALL NOT HAVE CONTROL OR CHARGE OF, AND SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES; FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK; OR FOR ACTS OF OMISSION OF THE CONTRACTOR, SUBCONTRACTORS, OR ANY OTHER PERSONS PERFORMING ANY OF THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

CONTRACTOR SHALL COORDINATE THE SEQUENCING OF ALL WORK WITH OWNER SPECIFIED REQUIREMENTS IN ORDER TO MAINTAIN OPERATION OF THE EXISTING FACILITY DURING THE COURSE OF CONSTRUCTION.

ALL SPECIALTY BOLTS, INCLUDING EXPANSION TYPE AND EPOXY TYPE ANCHORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S PRINTED INSTRUCTIONS.

ALL CODES, STANDARDS, SPECIFICATIONS AND TECHNICAL NOTES REFERENCED IN THESE PROJECT SPECIFICATIONS SHALL BE THE LATEST EDITION OR SHALL BE THE EDITION INCORPORATED BY REFERENCE IN THE ADOPTED GOVERNING CODES OF THE AUTHORITY HAVING JURISDICTION, AS APPLICABLE.

"PROVIDE" SHALL BE INTERPRETED TO MEAN FURNISH AND INSTALL UNLESS OTHERWISE NOTED.

DESIGN LOADS: IBC 2021

DEAD LOADS:
FIRST FLOOR: **70 PSF**

LIVE LOADS:
FIRST FLOOR: **100 PSF**

STRUCTURAL STEEL FRAMING

ALL STRUCTURAL STEEL SHALL BE PRIME PAINTED AFTER FABRICATION WITH BOLTED FIELD CONNECTIONS.

STRUCTURAL STEEL W-SHAPE MEMBERS SHALL CONFORM TO ASTM A992, GRADE 50. ALL OTHER STRUCTURAL STEEL SHALL CONFORM TO ASTM A36, GRADE 36, UNLESS INDICATED OTHERWISE BELOW.

STRUCTURAL STEEL TUBING SHALL CONFORM TO ASTM A500, GRADE B.

BOLTS FOR CONNECTING STRUCTURAL STEEL SHAPES SHALL BE ASTM A325, 3/4-INCH DIAMETER, UNLESS OTHERWISE NOTED ON THE DRAWINGS.

ANCHOR RODS SHALL CONFORM TO ASTM F1554, GRADE 55.

DESIGN, FABRICATION AND ERECTION OF ALL STRUCTURAL STEEL SHALL BE IN ACCORDANCE WITH THE "SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS" BY THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC).

WELDING SHALL BE IN ACCORDANCE WITH THE "STRUCTURAL WELDING CODE – STEEL" BY THE AMERICAN WELDING SOCIETY (AWS). WELDING ELECTRODES SHALL BE E70 SERIES.

ANY CONNECTION NOT SPECIFICALLY DETAILED ON THE STRUCTURAL DRAWINGS SHALL BE DESIGNED AND DETAILED BY THE STRUCTURAL STEEL FABRICATOR IN ACCORDANCE WITH THE AISC "STEEL CONSTRUCTION MANUAL". DESIGN CONNECTIONS FOR THE MINIMUM SHEAR CAPACITIES NOTED IN THE AISC BEAM TABLES OR FOR THE REACTIONS SHOWN ON THE DRAWINGS.

STEEL FABRICATOR IS SOLELY RESPONSIBLE FOR FIELD SURVEYING AND VERIFICATION OF EXISTING CONDITIONS, INCLUDING BUT NOT LIMITED TO, THE LOCATION, ELEVATION AND DIMENSIONS OF EXISTING WALLS AND FRAMING.

FIELD CUTTING OF STRUCTURAL STEEL MEMBERS FOR THE WORK OF OTHER TRADES WITHOUT PRIOR APPROVAL OF THE DESIGN PROFESSIONAL SHALL NOT BE PERMITTED.

NTDESIGNS24@GMAIL.COM

S
E O
Nord

06 OCT 26

I CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND

CONCRETE FLOOR PLANK REMEDIATION
NANTUCKET CONDOMINIUM, UNIT#1
12503 WIGHT STREET, OCEAN CITY, MARYLAND

DATE	REVISION/ISSUE
10/06/26	FOR CONSTRUCTION

JOB NO:

DRAWN BY: NT

SHEET TITLE:
PLANS AND DETAIL

SHEET NO:
S-1